



# Single- and Three-Phase Power in a Compact and Safe Package



The DIN-A-MITE® B power controller provides a low-cost, highly compact and versatile solid state option for controlling electric heat. This controller is designed and manufactured with the quality features expected from Watlow®. DIN-rail and panel mounting are standard on every control. There is no need to worry about mercury, the DIN-A-MITE controller is mercury free.

Features include single-phase and three-phase zero cross switching up to 40 and 22 amperes, respectively, at 600VAC (see rating curve). A unique, integrated design removes the guesswork associated with selecting a proper heat sink and adequate terminations for the application.

Variable time-base, 4-20mA process control and VAC/VDC input contactor versions are available. A shorted output alarm option is also available. All options are model number dependent and factory configurable. This power controller includes 200KA short circuit current rating (SCCR) tested up to 480VAC to minimize damage in the event of a short circuit when used with required fusing.

## Features and Benefits

### 200KA SCCR with proper fusing

- Minimizes damage in the event of a short circuit

### DIN-rail and panel mounting

- Provides versatility and quick, low-cost installation

### Compact size

- Reduces panel space and cost

### Touch-safe terminals

- Increases safety for installer and user

### Single- and three-phase power

- Permits use in a variety of applications

### Mercury free

- Assures environmental safety

### Faster switching with solid state

- Saves energy and extends heater life

### UL® 508 listed, C-UL®, RoHS 2 and CE with filter

- Meets applications requiring agency approval
- Reduces end product documentation cost

### Back-to-back SCR design

- Ensures a rugged design

### Shorted output alarm (optional)

- Simplifies troubleshooting and reduces downtime

Watlow® and DIN-A-MITE® are registered trademarks of Watlow Electric Manufacturing Company.

UL® and C-UL® are registered trademarks of the Underwriter's Laboratories, Inc.

*Powered by Possibility*

To be automatically connected to the nearest North American Technical Sales Office:

**1-800-WATLOW2 • [www.watlow.com](http://www.watlow.com)  
[inquiry@watlow.com](mailto:inquiry@watlow.com)**

#### International Technical Sales Offices:

<b>China</b>	+86 21 3532 8532	<b>Italy</b>	+39 02 4588841	<b>Singapore</b>	+65 6773 9488
<b>France</b>	+33 1 41 32 79 70	<b>Japan</b>	+81 3 3518 6630	<b>Spain</b>	+34 91 675 1292
<b>Germany</b>	+49 7253 9400 0	<b>Korea</b>	+82 2 2169 2600	<b>Taiwan</b>	+886 7 288 5168
<b>India</b>	+91 40 6661 2700	<b>Mexico</b>	+52 442 256 2200	<b>UK</b>	+44 115 964 0777

ISO 9001



## Specifications

### Operator Interface

- Control input and indication light
- Alarm output and indication light

### Amperage Rating

- See the output rating curve
- Max. surge current for 16.6ms, 380A peak
- Max. I<sup>2</sup>t for fusing is 4,000A<sup>2</sup>s
- Latching current: 400mA max.
- Holding current: 200mA max.
- Off-state leakage 1mA at 77°F (25°C) max.
- Power dissipation = 1.2 watts per ampere per leg switched
- 200KA SCCR, Type 1 and 2 approved with the recommended fusing; see user manual.

### Line Voltage

- 24 to 660VAC model number dependent; see ordering information

### Control Mode, Zero Cross

- Control option C: VDC input, contactor output
- Control option K: VAC input, contactor output
- To increase service life on contactor models, the cycle time should be less than three seconds
- Control option F: 4 to 20mA DC input, variable time-base control output

### Control Input

- AC contactor: 24VAC ±10%, 120VAC +10/-25%, 240VAC +10/-25% @ 25mA max. per controlled leg
- DC contactor: 4.5 to 32VDC: max. current @ 4.5VDC is 6mA per leg. Add 2mA per LED used to the total current
- Loop powered linear current 4 to 20mA DC: loop-powered, control option F0 only (requires current source with 8.0VDC available, no more than two DIN-A-MITE inputs can be connected in series)

### Alarm

#### Shorted SCR Alarm Option

- Alarm state when the input command signal off and a 10A or more load current is detected by the current transformer (two turns required for 5A and three turns for 2.5A)

#### Alarm Output

- Energizes on alarm, non-latching
- Triac 24 to 240VAC, external supply with a current rating of 300mA @ 77°F (25°C), 200mA @ 122°F (50°C), 100mA @ 176°F (80°C) and a holding current of 200 µA with a latching current of 5mA typical

## Ordering Information

### Part Number

①	②	③	④	⑤ ⑥	⑦ ⑧	⑨	⑩	⑪ ⑫
<b>D</b>	<b>B</b>	Phase	Cooling & Current Rating	Line & Load Voltage	Control	Alarm	User Manual	Custom Options

③	Phase
1 =	1-phase, 1 controlled leg
2 =	3-phase, 2 controlled legs
3 =	3-phase, 3 controlled legs
8 =	2 independent zones (control options C or K)
9 =	3 independent zones (control options C or K)

④	Cooling and Current Rating (see rating curve)
0 =	Natural convection

⑤ ⑥	Line and Load Voltage
02 =	24 to 48VAC
24 =	120 to 240VAC
60 =	277 to 600VAC

⑦ ⑧	Control
C0 =	4.5 to 32VDC input, contactor output
F0 =	4 to 20mA DC input, variable time-base output
K1 =	22 to 26VAC input, contactor output
K2 =	100 to 120VAC input, contactor output
K3 =	200 to 240VAC input, contactor output

### Agency Approvals

- CE with proper filter:
  - 204/108/EC Electromagnetic Compatibility Directive
  - EN 61326-1: Industrial Immunity Class A Emissions
- 2006/95/EC Low Voltage Directive
- EN 50178 Safety Requirements
- Installation category III, pollution degree 2
- UL® 508 listed and C-UL® File E73741
- 2011/65/EU RoHS 2

### Control Input Terminals

- Compression: will accept 24 to 16 AWG (0.2. to 1.5 mm<sup>2</sup>) wire

### Line and Load Terminals

- Compression: will accept 18 to 8 AWG (0.8 to 8.4 mm<sup>2</sup>) wire

### Operating Environment

- See the output rating curve
- 0 to 90% RH (relative humidity), non-condensing
- Storage temperature: -40 to 185°F (-40 to 85°C)
- Operating temperature: -4 to 176°F (-20 to 80°C)
- Insulation tested to 3,000 meters

### DIN-rail Mount

- DIN EN 50022, 35 mm by 7.5 mm

### Back-Panel Mount


- Four mounting holes No. 6 to No. 8 (M3 to M4) fastener

### Dimensions

- 3.7 in. (94 mm) high x 3.3 in. (83 mm) wide x 4.9 in. (124 mm) deep
- Weight: 1.5 lb (0.68kg)

Specifications are subject to change without notice.

### Output Rating Curve

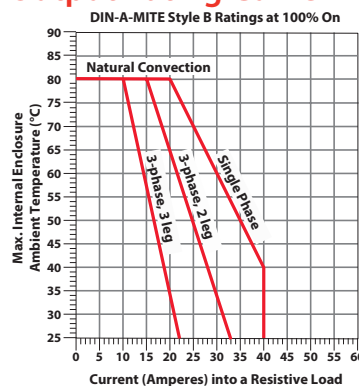

### Current Rating Table

Phase	Cooling	Current at 122°F (50°C)
1	0	35A
2, 8	0	25A
3, 9	0	17A

⑨	Alarm
0 =	No alarm
S =	Shorted SCR alarm

⑩	User Manual
0 =	English
1 =	German
2 =	Spanish
3 =	French

⑪ ⑫	Custom Options
00 =	Standard part
XX =	Any letter or number, custom options

## Recommended DIN-rail Mount Fuses and Fuse Holders

### Semiconductor Fuses and Holders DFJ Combination Fuses and Holders

Part Nbr.	Description	Part Nbr.	Description
17-8020	20A fuse	0808-0325-0020	20A fuse
17-8025	25A fuse	0808-0325-0030	30A fuse
17-8030	32A fuse	0808-0325-0040	40A fuse
17-8040	40A fuse	0808-0325-0050	50A fuse
17-8050	50A fuse	0808-0326-1530	15-30A holder
17-5110	10-25A holder	0808-0326-3560	35-60A holder
17-5114	32-50A holder		